

# Renoplast K10

## DRIP EDGE

K10 drip edge is part of BASIC K10 system used with 2-3 mm thick resin flooring systems.



### KEY FEATURES

- cost-effective profile, carefully shaped to ensure efficient evacuation of water from terraces, patios and balconies
- watertight barrier at eaves
- long-term durability and full corrosion resistance

### TECHNICAL DATA

<b>BODY</b>	made of AW 6060 aluminium alloy
<b>WEIGHT</b>	approx. 390 g/m (linear meter)
<b>COATING</b>	0.6 - 1.2 g/m <sup>2</sup> conversion coating, and min. 60 µm polyester powder coating


### INSTALLATION TOOLS

You will need the following tools: folding ruler, spirit level, knife, electric drill, hand-held mixer, steel plastering trowel, string line, pencil, spatula, metal handsaw or circular saw. Circular saw should be equipped with an aluminium cutting blade to cut without damaging the coating.


### AUXILIARY COMPONENTS




K10 90  
EXTERNAL CORNER



K10 90  
INTERNAL CORNER



K10 135  
EXTERNAL CORNER



K10 135  
INTERNAL CORNER



LK10/LK100/LK10R/  
LK100R  
DRIP EDGE CLIP



OPK10/OPK100/OP10R/  
OP100R R+L WALL  
PROTECTION END CAPS

### BASE

The substrate must be sound, level, clean and dry. Cement screeds must reach the minimum compressive strength required by the resin manufacturer after 28 days of curing.

### AMBIENT CONDITIONS DURING INSTALLATION

Ambient conditions should be as typically required for waterproofing and installation work.

### COLOURS

Standard colours: RAL 7037 dusty grey, RAL 7024 graphite grey, RAL 8019 grey brown. Other colours from RAL Classic chart are available on request.

# Renoplast K10

## DRIP EDGE

K10 drip edge is part of BASIC K10 system used with 2-3 mm thick resin flooring systems.



### INSTALLATION

Drip edges should be set on appropriate resin or flexible sealant and secured in place with plastic plugs. Follow the installation guide available at: <https://www.renoplast.pl/download>.

SEE PRODUCT →



### INSTALLATION GUIDELINES


Protect the paint coat from damage during installation. Reject any damaged components. Any dirt should be removed from the surfaces using water and non-abrasive cloth. Wet materials, such as sealing slurry or tile adhesive should be removed from the outer surfaces before drying. The manufacturer shall not be liable for any damage resulting from product misuse or using inadequate auxiliary materials or tools. All work must be in compliance with construction plans, product data sheet, relevant standards, good construction practice and safety requirements.

### MAINTENANCE GUIDELINES


During use clean the trims at least twice a year. For cleaning use clean water and non-abrasive cloth. Do not use highly acidic or highly alkaline cleaners or surfactants which may react with aluminium. Do not use organic solvents containing esters, ketones, aromatic compounds, glycol esters, chlorinated hydrocarbons, etc. After cleaning rinse the surfaces with cold clean water. Do not use salt or other de-icing chemicals near the trims. We recommend to check the condition of the relevant terrace, patio and balcony components every six months. Immediately remove any discovered defects.

### DIMENSIONS


#### CROSS-SECTION:




K10 DRIP EDGE




K10 90  
EXTERNAL CORNER




K10 90  
INTERNAL CORNER




K10 135  
EXTERNAL CORNER



K10 135  
INTERNAL CORNER



LK10/LK100/ LK10R/  
LK100R  
DRIP EDGE CLIP




OPK10/OPK100/OP10R/  
OP100R R+L WALL  
PROTECTION END CAPS


# Renoplast K10

## DRIP EDGE


K10 drip edge is part of BASIC K10 system used with 2-3 mm thick resin flooring systems.

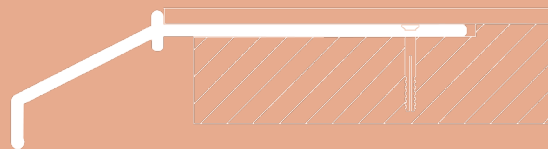

### INSTALLATION EXAMPLE

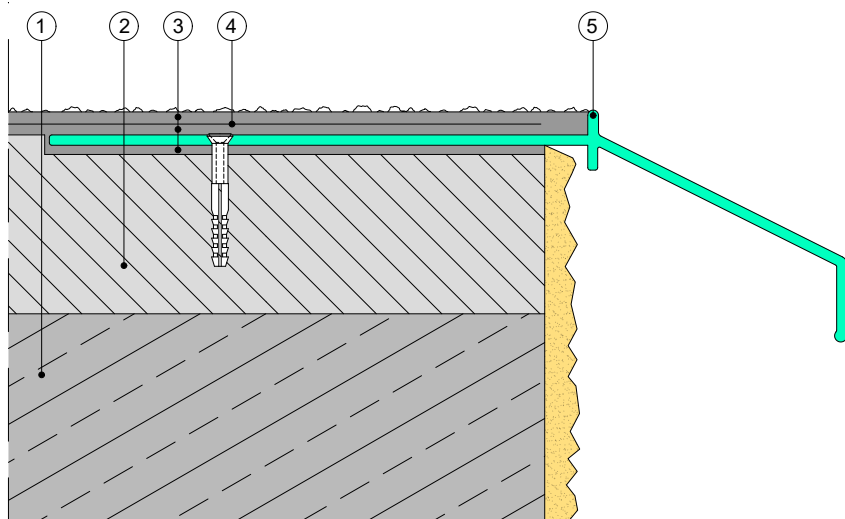

1. Structural slab
2. 1.5-2% sloping layer
3. Resin flooring layer(s) with slip-resistant broadcast additive
4. Reinforcing tape/ nonwoven recommended by the resin manufacturer
5. K10 drip edge

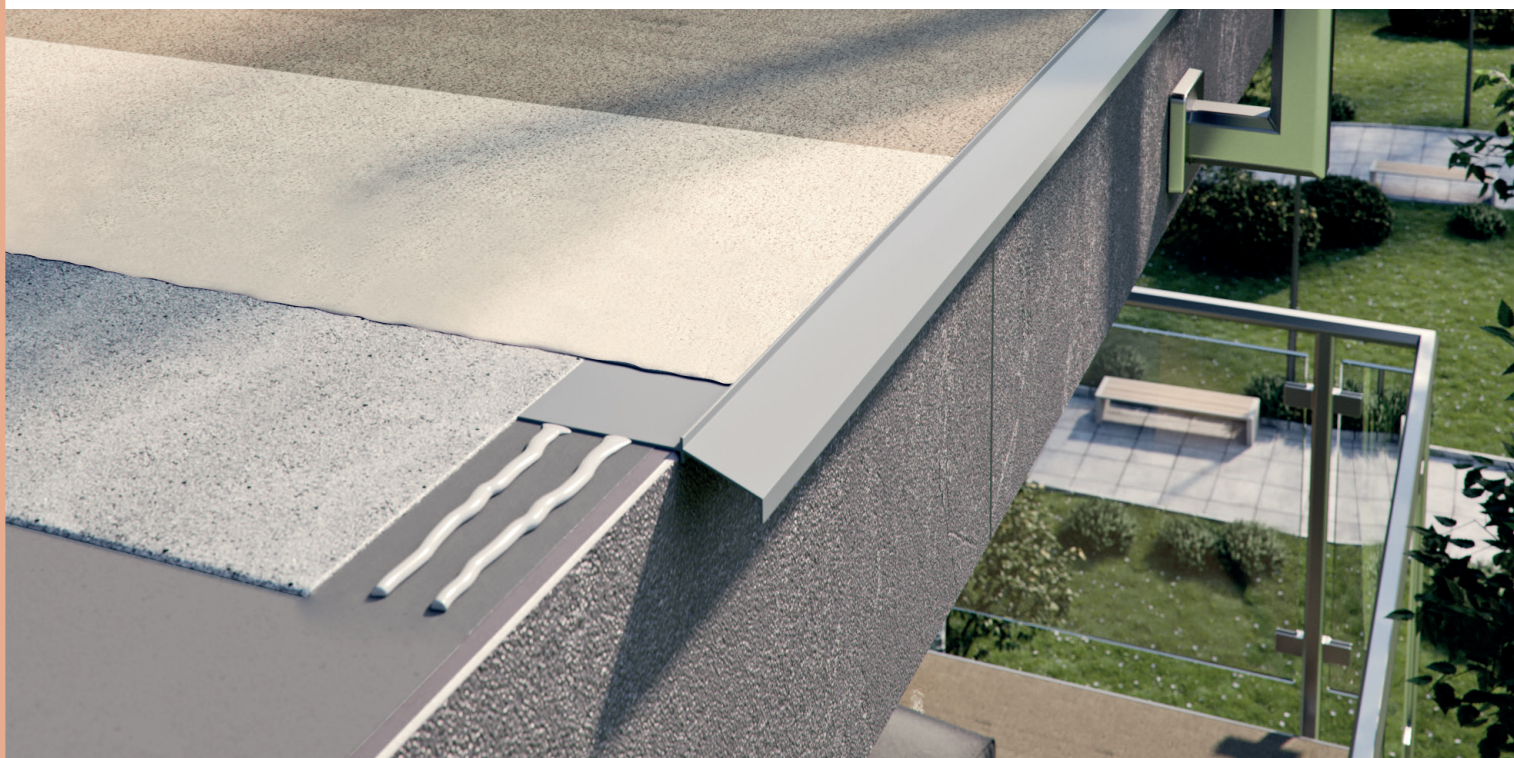

#### Notes:

Edition: 4.05.2026. This product brochure supersedes all previous editions. It gives recommendations for standard application conditions only, and thus shall not be used in place of installation drawings. Suitability of our products for particular conditions should be verified by the contractor. The actual product specifications may vary slightly due to allowable process or tool dimension changes. Any materials used in combination with Renoplast products must be obtained from reputable sources. Our liability for any omissions or inaccuracies of the data given in this brochure is limited to gross disinformation and/or negligence.

Renoplast

RENOPLAST Sp. z o.o.  
phone: +48 697 635 580  
office@renoplast.pl  
www.renoplast.pl/en

